

PROCEEDINGS OF THE DIRECTOR
GROUND WATER DEPARTMENT, JALAVIJNANA BHAVAN,
AMBALAMUKKU, THIRUVANANTHAPURAM
(PRESENT: Smt. ANCY JOSEPH)

Sub: Ground Water Department – Thiruvananthapuram– Construction of bore well at Suravakani, Amboori Grama Panchayath in Thiruvananthapuram District under Groundwater based drinking water supply scheme – sanctioned - orders issued.

ORDER NO:- T(1) / 2407/2022/DGW

Dated: 28.04.2022

Read:- Letter No. GW/DOT/1556/2021 dated 06-04-2022 from District Officer, Ground Water Department, Thiruvananthapuram.

ORDER

As per the letter read, District Officer, Ground Water Department, Thiruvananthapuram has forwarded a proposal for the construction of bore well at Suravakani, Amboori Grama Panchayath in Thiruvananthapuram District for an estimated amount of Rs. 81,317/- (Rupees Eighty one thousand three hundred and seventeen only) and requested for the sanction under Ground Water Based Drinking Water Supply Scheme.

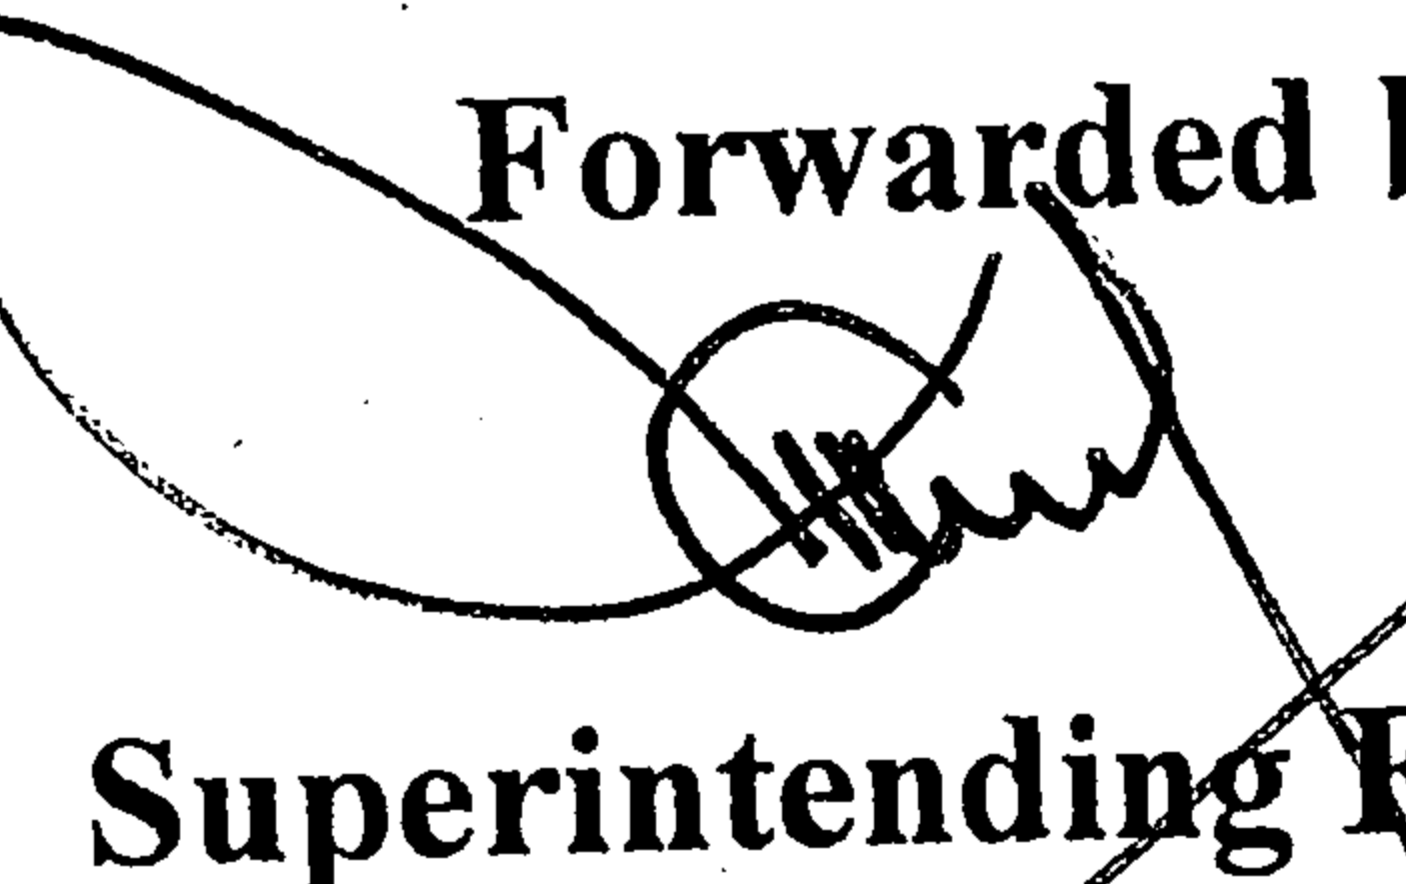
After detailed verification, the estimate amount is limited to Rs. 81,260/- (Rupees Eighty one thousand two hundred and sixty only) .

In the above circumstances, sanction is hereby accorded to the District Officer, Ground Water Department, Thiruvananthapuram for the construction of bore well at Suravakani, Amboori Grama Panchayath in Thiruvananthapuram District for an amount of Rs. 81,260/- (Rupees Eighty one thousand two hundred and sixty only)

The District Officer, Ground Water Department, Thiruvananthapuram should ensure that the work should be carried out as per Government rules and that the scheme satisfies all the norms and conditions of Ground Water Based Drinking Water Supply Scheme. The District Officer should forward detailed estimate for Water Supply Scheme as per the yield after construction of bore well.

The expenditure in this regard can be met from the fund available under the head of account “4702-00-102-94 Plan” scheme for Ground Water Based Drinking Water Scheme for the financial year 2022-2023

Sd/-
DIRECTOR

Forwarded by order

Superintending Engineer

To

1. The District Officer, Ground Water Department, Thiruvananthapuram.
2. SE /EE/FO/OC/SF

GV/DOT/1556/2021

ESTIMATE FOR THE CONSTRUCTION OF BORE WELL AT SOORAVAKKANI, AMBOORI GRAMAPANCHAYAT, PARASSALA CONSTITUENCY, THIRUVANATHAPURAM.

DETAILS OF BORE WELL CONSTRUCTION

Total depth to be drilled 90 m

Expected Over Burden 20 m

Diameter of Bore 121 mm

Sl. No	Description	Qty	Unit	Rate	Amount
1	Drilling charge	90	m	390	35100
2	Cost of 140 mm dia PVC pipe 6 kg/cm ² used for casing pipe.	20	m	481 542	9680 10840
3	Cost of 110 mm dia PVC pipe 6 kg/cm ² used for casing pipe.	91	m	305 340	27573 30940
4	Cost of 140 mm dia PVC end cap	1	No	225	225
Total				72578	77105
12% GST for drilling charge				8682.36	4212
Grand Total				81260.36	81317

(Rupees Eighty One Thousand Three Hundred and Seventeen only)

81260

Certified that the site confirm the norms of GWDWSS.

peya
02

CA
JOE

and
AE

[Signature]
DISTRICT OFFICER